

Carrelli monorotaia

Monorail trolleys


CARRELLI PER MONOROTAIE CURVE

TROLLEYS FOR CURVED MONORAIL


Tipo 43

Per carrelli paranco a ingombro normale idonei a scorrere su monorotaie con curve e precisamente:
 Portata fino a 4 t raggio min. 1500 mm.
 Portata fino a 10 t raggio min. 2500 mm.


Articulated standard headroom monorail hoist units:
 Lifting capacity up to 4 t (minimum radius 1500 mm).
 Lifting capacity up to 10 t (minimum radius 2500 mm).



-A- CARRELLO MOTORE - DRIVING TROLLEY

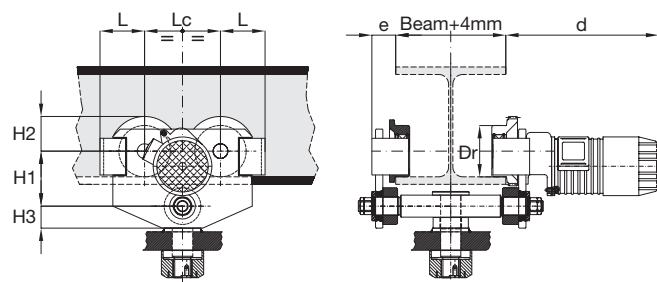

-B- CARRELLO FOLLE - IDLE TROLLEY

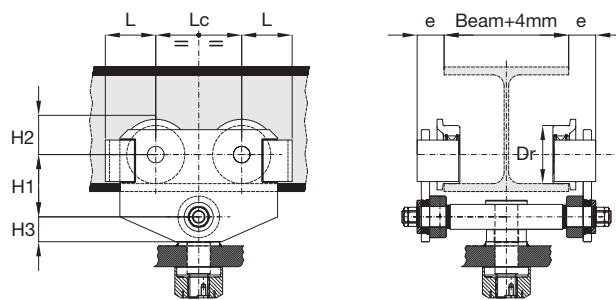

Portata max Max capacity	Raggio min Min radius	Dimensioni Dimensions									Velocità Speed	Potenza Power	Peso Weight	
kg	m	DR mm	d mm	e mm	Lc mm	L mm	H mm	H1 mm	H2 mm	H3 mm	m/min	kW	A kg	B kg
4500	1,5	120	450	110	183	110	142	130	60	50	18/6	0,37/0,12	80	60
10000	2,0	140	450	120	207	125	142	150	60	60	18/6	0,55/0,18	120	95
13250	2,0	140	250*	140	207	125	165	150	60	60	18/6	0,75/0,25	130	105
16000	3,5	160	300*	70	310	150	275	200	210	75	18/6	1,1/0,37	250	200
25000	3,5	210	310*	140	310	150	275	245	210	100	16/5,3	1,5/0,55	360	300

* Con motoriduttore ortogonale / With orthogonal motoreducer

